


Optical Network Interface Box ONIB

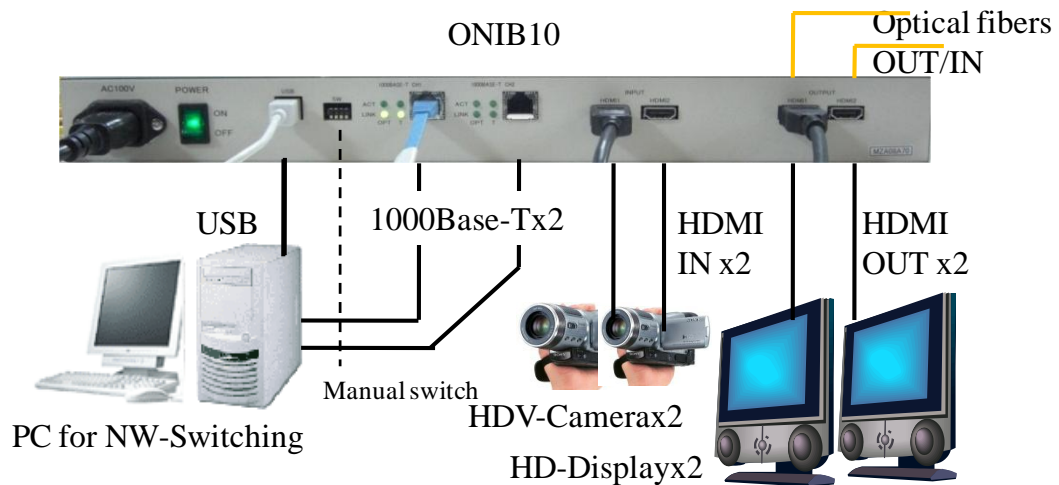

Specification and Features

1. 2-channels HDMI/DVI-OE/EO Converters
4-CWDM-waves/1- channel x2 : 8-wavelengths in 1470~1610nm with 20nm-space
 2. 2-channels 1000Base-T : 2-wavelengths of 1330 and 1350nm
 3. Channel-switching by the wavelength-selection through the PC
 4. Distance from end to end is about 20km for SM-fibers and 200m for GI-POF
- * The part of development of products was supported by SCOPE of MIC in Japan in 2006-2008
* Features and specification are subject to change without notice for improvement.